

NLA-10-18000-25-50

0.01~18GHz, 25dB, 5dB

Features:

- * Broad Band
- * Low Noise

Applications:

- * Wireless
- * Receiver
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.01~18GHz
Gain:	25dB min.
Gain Flatness:	±1.0dB typ.
Output Power (P1dB):	10dBm min.
Noise Figure:	5.0dB max.
Spurious:	-60dBc max.
VSWR:	2.2 max.
Voltage:	+12V typ.
Current:	150mA typ.
Impedance:	50Ω

Mechanical


Size*1:	27.2*17.8*7.4mm 1.071*0.701*0.291in
RF Connectors:	SMA Female
Power Supply Connectors:	Feed Through/Terminal Post

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-Operating Temperature:	-55~+85°C

Outline Drawings

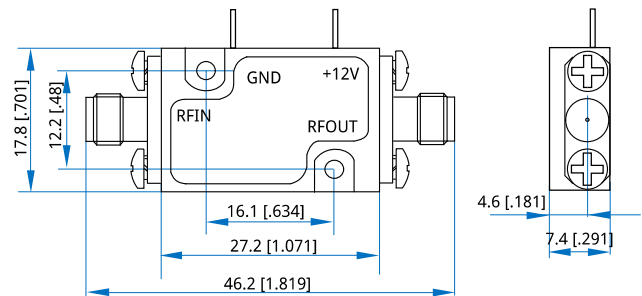

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

NLA-10-18000-25-50

Customization is available upon request.