

NBF-10200-10600-30 10.2~10.6GHz, 30dB

- Features:

 - * High Stopband Rejection
 - * Small Size
- Applications:

 - * Telecom
 - * Laboratory Test
 - * Receivers
 - * Instrumentation

Electrical

Passband:	10.2~10.6GHz
Passband Insertion Loss:	1.5dB max.
VSWR:	1.5 max.
Stopband Attenuation:	30dB@10GHz min. 30dB@10.8GHz min.

Mechanical


Size ^{*1} :	59*13*10mm 2.323*0.512*0.394in
Connectors:	SMA Female
Mounting:	4-M2 through hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-40~+70°C
Non-operating Temperature:	-55~+85°C

Outline Drawings

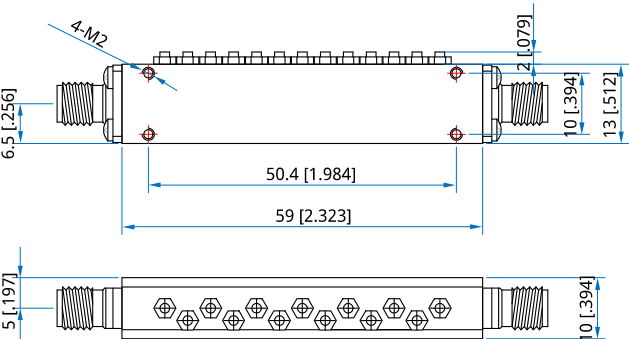

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order
NBF-10200-10600-30

Customization is available upon request.