

NFA18K6

DC~18GHz, 600W

Features:

- * Low VSWR
- * High Attenuation Flatness

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	DC~18GHz
Attenuation:	3, 6, 10~60dB
Impedance:	50Ω
Average Power*1:	600W@25°C max.
Peak Power:	5KW (5μS pulse width, 6% duty cycle) @DC~12.4GHz 1KW (5μS pulse width, 30% duty cycle) @18GHz

[1] Derated linearly to 30W@120°C.

Mechanical

RF Connectors: N Male, N Female


Environmental

Temperature: -55~+125°C


Length (mm/in)

Attenuation (dB)	L (mm [in])
3	305 [12.008]
6	407 [16.024]
10~60	509 [20.039]

Outline Drawings

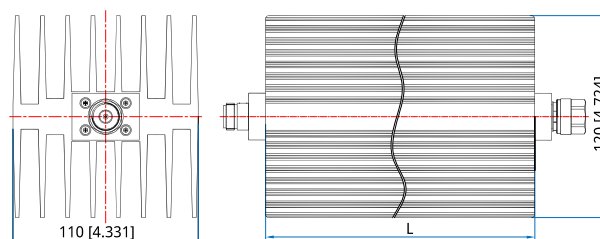

Outline A

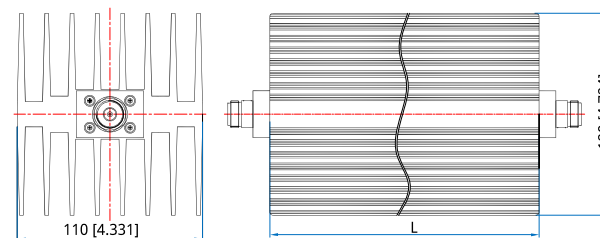

Outline B

Unit: mm [in]

Tolerance: ±2mm [±0.08in]

Attenuation Accuracy and VSWR

Frequency (GHz)	Attenuation Accuracy (±dB) vs. Attenuation (dB)								VSWR (max.)
	3	6	10	20	30	40	50	60	
DC~4	0/+2	-1/+1.5	-0.6/+1.5	1.2	1.0	1.0	1.0	1.0	1.25
DC~8	-	-	-0.5/+2.0	2.0	1.1	1.1	1.1	1.1	1.30
DC~12.4	-	-	3.0	2.0	-1.5/+2.0	1.2	1.2	1.2	1.35
DC~18	-	-	6.0	5.0	-2.0/+6.0	2	1.5	1.5	1.50

How To Order

NFA18K6-X-Y-Z

X: Frequency in GHz

Y: Attenuation in dB

Z: Connector type

Examples:

To order an attenuator, DC-18GHz, N male to N female, 50dB attenuation, specify NFA18K6-18-50-N.

Connector naming rules:

N - N Male to N Female (Outline A, 3, 6, 10~60dB)

NFNF - N Female to N Female (Outline B, 10~60dB)