

NSA06D

DC~6GHz, 0~101dB, 10W

Features:

- * Low VSWR
- * High Attenuation Flatness

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Description

NSA06D series Rotary Stepped Attenuators cover frequency range DC~6GHz. Rotary stepped attenuators can adjust the power level of microwave circuit in a certain frequency range by step.

Specifications

Frequency (GHz)	Attenuation Range/Step (dB)	VSWR (Max.)	IL (dB Max.)	Attenuation Accuracy (±dB)	Avg Power (W)	Connectors
DC~2.5	0~71/0.1	1.5	1.5	0.3 (0.1~1dB), 0.4 (1~10dB), 0.8 (10~60dB), 1.5 (71dB)	2, 10	N
DC~3		1.6	1.7			
DC~4.3		1.7	2			
DC~6		1.75	2.5			
DC~2.5	0~101/0.1	1.5	1.5	0.3 (0.1~1dB), 0.4 (1~10dB), 0.8 (10~60dB), 1.5 (61~70dB), ±3. 5% (70~101dB)	2, 10	N
DC~3		1.6	1.7			

Electrical

Impedance: 50Ω

Peak Power^{*1}: 100W

[1] Pulse width: 5us, duty cycle: 2%.

Mechanical

Size: 250.5*87*79mm

9.862*3.425*3.11in

Weight: 1.25Kg


RF Connectors: N Female

Housing Materials: Aluminum

Environmental

Temperature: -20~+85°C

Outline Drawings

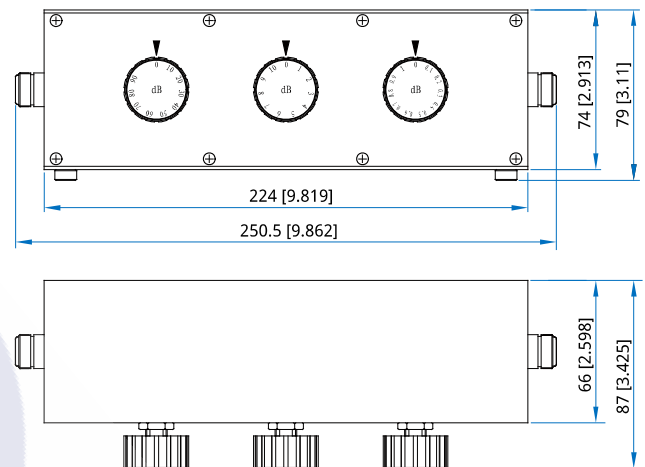

Unit: mm [inch]

Tolerance: ±1mm [±0.04in]



Rotary Stepped Attenuators

NSA06D-W-X-Y-Z

W: Stop Frequency in GHz

X: Maximum attenuation in dB

Y: Power in Watts

Z: Connector type

Connector naming rules:

N - N Female

Examples:

To order an attenuator, DC~4.3GHz, 0~71dB attenuation, 2W, N female, specify NSA06D-4.3-71-2-N.

Customization is available upon request.

