

NRHA770

0.96~1.46GHz, WR-770

Features:

- * Broadband

Applications:

- * Wireless
- * Transceiver
- * Laboratory Test
- * Broadcast

Electrical

Frequency:	0.96~1.46GHz
Gain:	15dB
VSWR:	1.4 max.

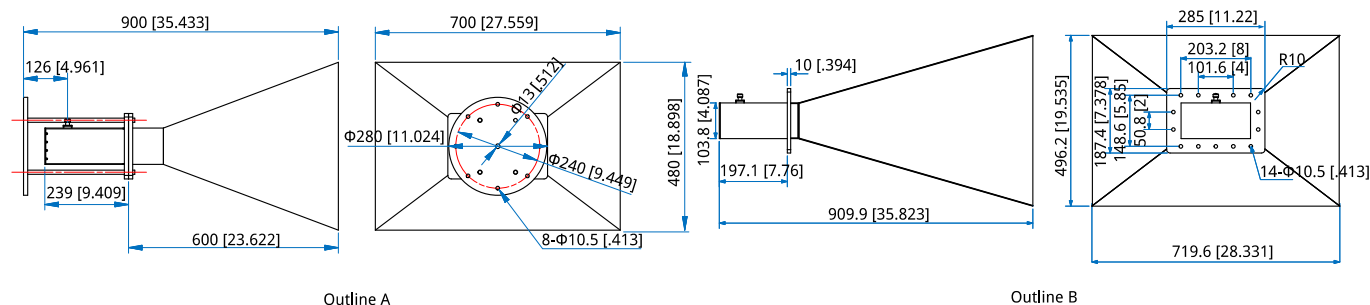
Mechanical

Interface: WR-770 (BJ12)
Flange: FDP12
Material: Aluminium

Environmental

Temperature: -55~+165°C

Outline Drawings

Unit: mm [in] Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

NRHA770-X-Y-Z

X: Gain in dB

15dB - Outline A, B

Y: Connector type if applicable

Z: Installation method if applicable

Connector naming rules:

N - N Female (Outline A, B)

S - SMA Female

Pannel Mount naming rules:

P - Pannel Mount (Outline A)

Examples:

To order an antenna, 0.96-1.46GHz, 15dB, WR-770, N Female, Pannel Mount, specify NRHA770-15-N-P.

Customization is available upon request.