

NWCA -+5-SF -E WR-75 to SMA Female, End Launch

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: 9.84~15GHz
VSWR: 1.2 max.

Mechanical


Length: 40mm
1.575in
RF Connectors: SMA Female
Interface: WR-75
Flange: FBP120
Material: Aluminium

How To Order

NWCA-75-SF-E

Customization is available upon request.

Outline Drawings

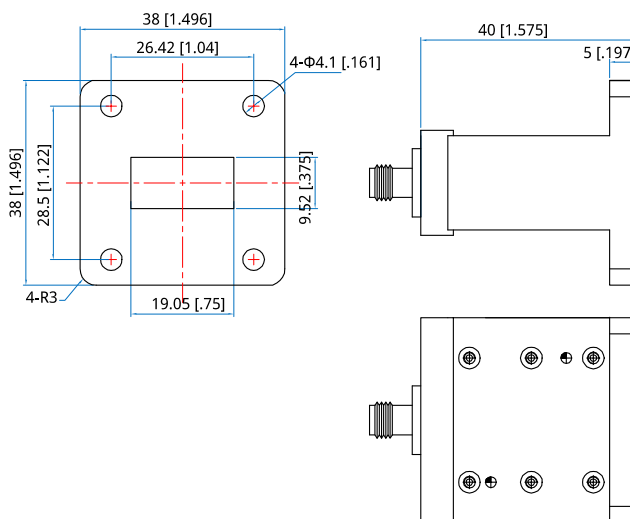

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]