

NWCA -* 50-SF -E WR-650 to SMA female, End launch

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: 1.13~1.73GHz
VSWR: 1.2 max.
Impedance: 50Ω

How To Order


NWCA-650-SF-E

Customization is available upon request.

Mechanical

Length: 160mm
6.299in
RF Connectors: SMA Female
Interface: WR-650
Flange: FDP14
Material: Aluminium

Outline Drawings

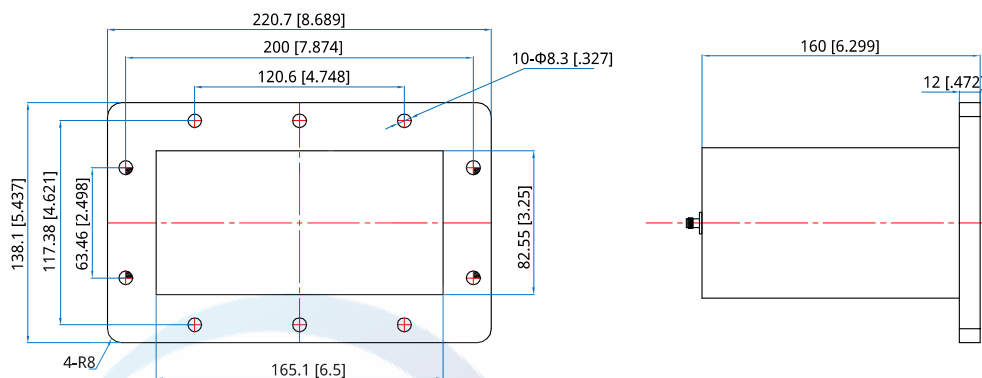

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]