

Waveguide to Coax Adapter

NWCA-510-NF-E WR-510 to N female, End launch

Features: * Low VSWR Applications: * Wireless * Transmitter * Laboratory Test

* Radar

Electrical

1.45~2.2GHz Frequency: VSWR: 1.2 max. Impedance: 50Ω


How To Order NWCA-510-NF-E

Customization is available upon request.

Mechanical

150mm
5.906in
N Female
WR-510
FDP18
Aluminium

Outline Drawings

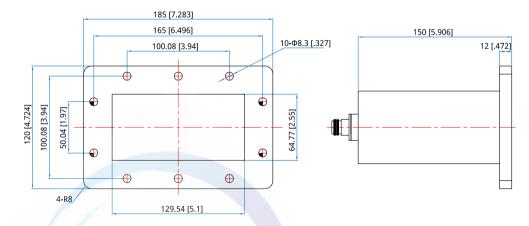

Unit: mm [in] Tolerance: ±0.2mm [±0.008in]