

NWCA-62-SF-R

WR-62 to SMA Female, Right Angle

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: 11.9~18GHz
VSWR: 1.2 max.

Mechanical


Length: 35mm
1.378in
RF Connectors: SMA Female
Interface: WR-62
Flange: FBP140
Material: Aluminum

How To Order

NWCA-62-SF-R

Customization is available upon request.

Outline Drawings

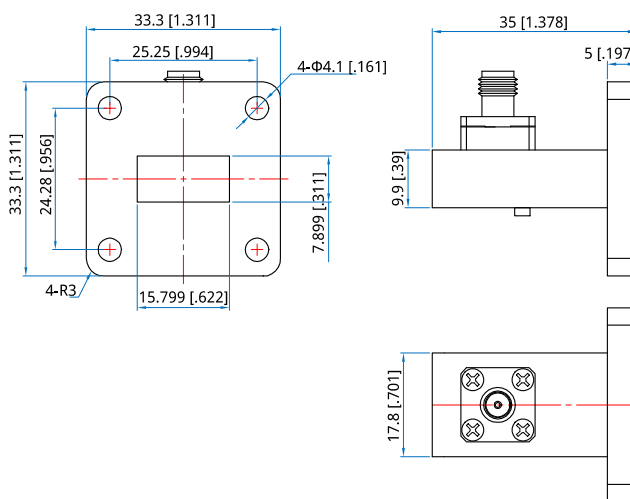

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]