

Waveguide to Coax Adapter

7 [.276]

NWCA -1, +-SF-E WR-187 to SMA female, End launch

Features: * Low VSWR Applications: * Wireless * Transmitter * Laboratory Test

* Radar

Electrical

Frequency: 3.94~5.99GHz VSWR: 1.2 max. Impedance: 50Ω


How To Order NWCA-187-SF-E

Customization is available upon request.

Mechanical

Length:	65mm
	2.559in
RF Connectors:	SMA Female
Interface:	WR-187
Flange:	FDP48
Material:	Aluminium

Outline Drawings

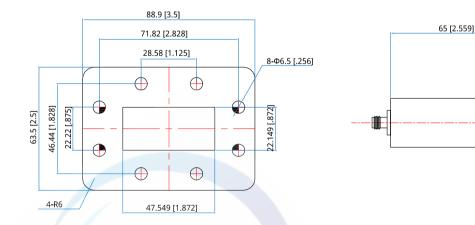

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]