

## NWCA -510-SF -E WR-510 to SMA female, End launch

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

### Electrical

Frequency: 1.45~2.2GHz  
VSWR: 1.2 max.  
Impedance: 50Ω

### How To Order


**NWCA-510-SF-E**

Customization is available upon request.

### Mechanical

Length: 150mm  
5.906in  
RF Connectors: SMA Female  
Interface: WR-510  
Flange: FDP18  
Material: Aluminium

### Outline Drawings

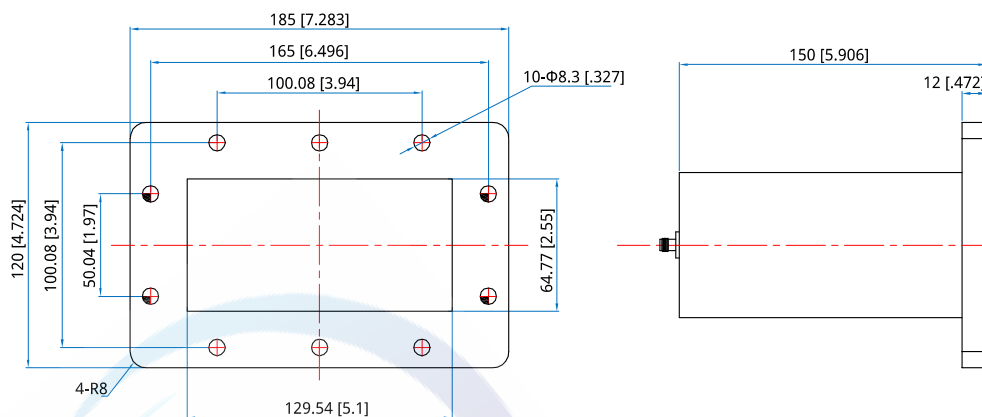

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]