

Waveguide to Coax Adapter

NWCA -' (O-+F-E WR-340 to 7/16 DIN female, End launch

Features: * Low VSWR Applications: * Wireless * Transmitter * Laboratory Test

* Radar

Electrical

Frequency:2.17~3.3GHzVSWR:1.2 max.Impedance:50Ω


How To Order NWCA-340-7F-E


Customization is available upon request.

Mechanical

Length: 90mm 3.543in RF Connectors: 7/16 DIN Female Interface: WR-340 Flange: FDP26 Material: Aluminium

Outline Drawings

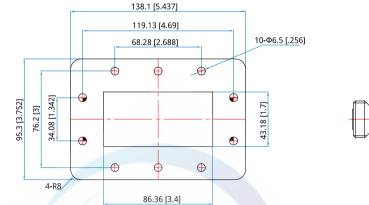



Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]