

Waveguide to Coax Adapters

NWCA-1' +-SF-E WR-137 to SMA female, End launch

Features: * Low VSWR Applications: * Wireless * Transmitter * Laboratory Test

* Radar

Electrical

Frequency: 5.37~8.17GHz VSWR: 1.2 max. Impedance: 50Ω


Mechanical

Length:	60mm
	2.362in
RF Connectors:	SMA Female
Interface:	WR-137
Flange:	FDP70
Material:	Aluminium

How To Order NWCA-137-SF-E

Customization is available upon request.

Outline Drawings

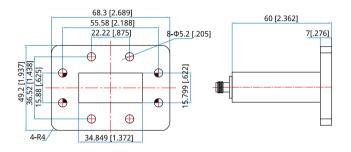

Unit: mm [in] Tolerance: ±0.2mm [±0.008in]