

NWCA -2, -2-R

WR-34 to 2.4mm Male, Right angle

Features:

* Low VSWR

Applications:

* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: 26.3–40GHz
VSWR: 1.2 max.
Impedance: 50Ω

Mechanical


Length: 30mm
1.181in
RF Connectors: 2.4mm male
Interface: WR-28
Flange: FBP320
Material: Copper

How To Order

NWCA-28-2-R

Customization is available upon request.

Outline Drawings

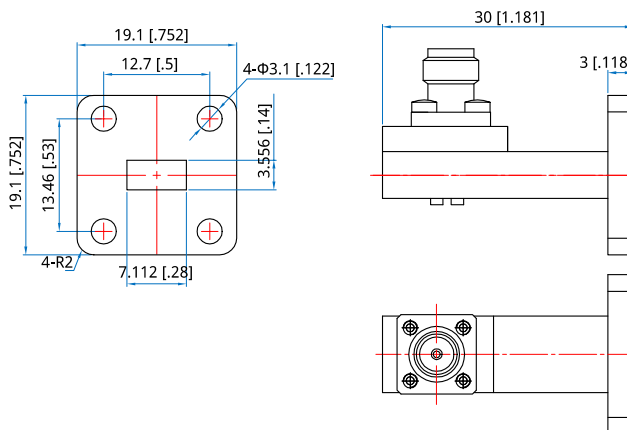

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]