

## NWCA -8 +50-NF -E WRD-750 to N Female, End Launch

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar

### Electrical

Frequency: 7.5~18GHz  
VSWR: 1.3 max.  
Impedance: 50Ω

### Mechanical


Length: 40mm  
1.575in  
RF Connectors: N Female  
Interface: WRD-750  
Flange: FPWRD750  
Material: Aluminium

### How To Order

**NWCA-D750-NF-E**

Customization is available upon request.

### Outline Drawings

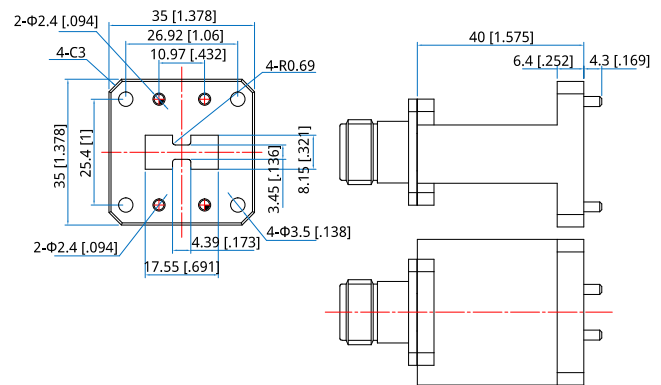

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]