

NWCA -2, -? F -E

WR-28 to 2.92mm Female, End Launch

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: 26.3~40GHz
VSWR: 1.2 max.

Mechanical


Length: 25mm
0.984in
RF Connectors: 2.92mm Female
Interface: WR-28
Flange: FBP320
Material: Copper

How To Order

NWCA-28-KF-E

Customization is available upon request.

Outline Drawings

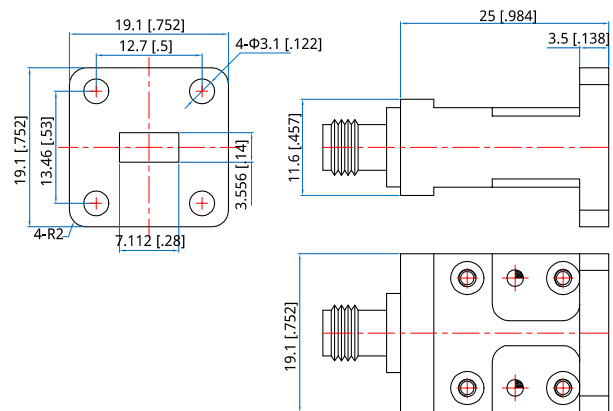

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]