

# Waveguide to Coax Adapter

# NWCA -\* 50-NF-E WR-650 to N female, End launch

Features: \* Low VSWR Applications: \* Wireless \* Transmitter \* Laboratory Test

\* Radar

#### Electrical

Frequency: 1.13~1.73GHz VSWR: 1.2 max. Impedance: 50Ω


## How To Order NWCA-650-NF-E

Customization is available upon request.

#### Mechanical

Length:	160mm
	6.299in
RF Connectors:	N Female
Interface:	WR-650
Flange:	FDP14
Material:	Aluminium

## **Outline Drawings**

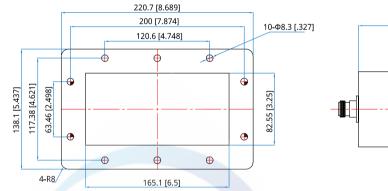

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

