

**NAMKN**

NMD 2.92mm to N

### Features:

\* Low VSWR

Applications:

- \* Wireless
- \* Transmitter
- \* Laboratory Test
- \* Radar

## Electrical

Frequency:	DC~18GHz
VSWR:	1.15 max.
Impedance:	50Ω


## Mechanical

RF Connectors:	NMD 2.92mm N
Mating Life Cycle:	2000 cycles min.
Outer Conductor:	Passivated SUS303 stainless steel
Dielectric:	PEI
Inner Conductor:	Gold plated beryllium copper

## Environmental

Temperature: -55~+165°C

## Outline Drawings

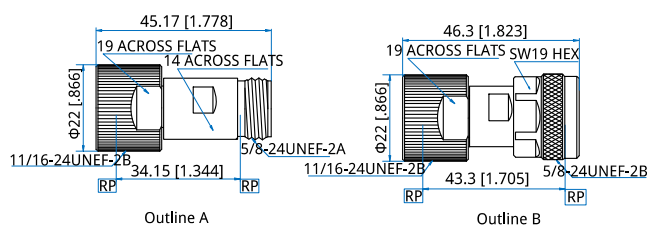

Unit: mm [in]

Tolerance:  $\pm 0.2\text{mm}$  [ $\pm 0.008\text{in}$ ]

## How To Order

**NAMKN-FF** - NMD 2.92mm (f) to N (f), Outline A

**NAMKN-FM** - NMD 2.92mm (f) to N (m), Outline B

Customization is available upon request.