

NAM2MK

NMD 2.4mm to NMD 2.92mm

- Features:

 - * Low VSWR
- Applications:

 - * Wireless
 - * Transmitter
 - * Laboratory Test
 - * Radar

Electrical

Frequency:	DC~40GHz
VSWR:	1.2 max.
Impedance:	50Ω


Mechanical

RF Connectors:	NMD 2.4mm NMD 2.92mm
Mating Life Cycle:	2000 cycles max.
Outer Conductor:	Passivated SUS303 stainless steel
Dielectric:	PEEK
Inner Conductor:	Gold plated beryllium copper

Environmental

Temperature:	-55~+165°C
--------------	------------

Outline Drawings

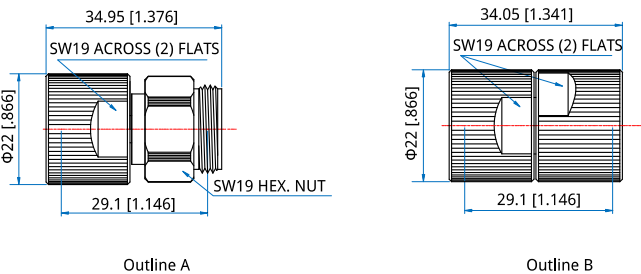

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

NAM2MK-FM - NMD 2.4mm(f) to NMD 2.92mm(m), Outline A
NAM2MK-FF - NMD 2.4mm(f) to NMD 2.92mm(f), Outline B

Customization is available upon request.