

NAM3M3

NMD 3.5mm to NMD 3.5mm

- Features:

 - * Low VSWR
- Applications:

 - * Wireless
 - * Transmitter
 - * Laboratory Test
 - * Radar

Electrical

Frequency:	DC~26.5GHz
VSWR:	1.15 max.
Impedance:	50Ω


Mechanical

RF Connectors:	NMD 3.5mm
Mating Life Cycle:	2000 cycles max.
Outer Conductor:	Passivated SUS303 stainless steel
Dielectric:	PEEK
Inner Conductor:	Gold plated beryllium copper

Environmental

Temperature:	-55~+165°C
--------------	------------

Outline Drawings

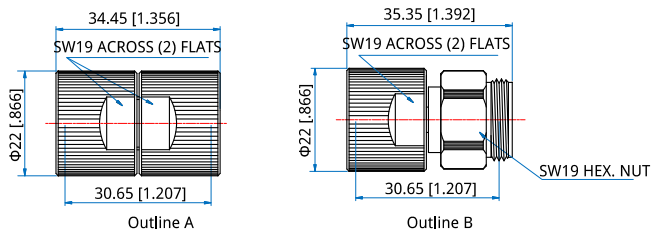

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

- NAM3M3-FF** - NMD 3.5mm(f) to NMD 3.5mm(f), Outline A
NAM3M3-FM - NMD 3.5mm(f) to NMD 3.5mm(m), Outline B

Customization is available upon request.