

## NASX SMA to MMCX

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Transmitter  
\* Laboratory Test  
\* Radar



### Electrical

Frequency:	DC~6GHz
VSWR:	1.2 max.
Impedance:	50Ω


### Mechanical

RF Connectors:	SMA MMCX
Mating Life Cycle:	500 cycles
Outer Conductor:	Gold plated brass
Dielectric:	PTFE
Inner Conductor:	Gold Plated Beryllium Copper

### Environmental

Temperature:	-55~+165°C
--------------	------------

### Outline Drawings

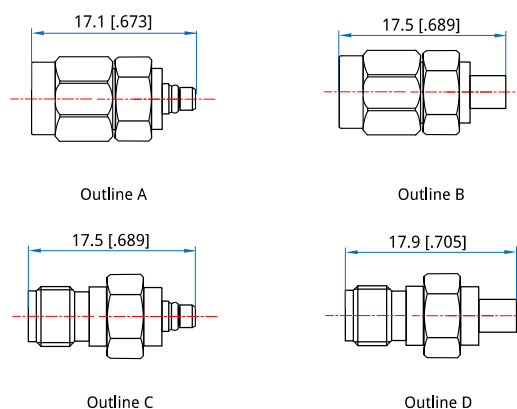

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**NASX-MM** - SMA(m) to MMCX(m), Outline A

**NASX-MF** - SMA(m) to MMCX(f), Outline B

**NASX-FM** - SMA(f) to MMCX(m), Outline C

**NASX-FF** - SMA(f) to MMCX(f), Outline D

Customization is available upon request.