

NAXX MMCX to MMCX

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency:	DC~6GHz
VSWR:	1.2 max. 1.5 max. (Outline C)
Impedance:	50Ω

Mechanical

RF Connectors:	MMCX
Mating Life Cycle:	500 cycles
Outer Conductor:	Gold plated brass
Dielectric:	PTFE
Inner Conductor:	Gold plated beryllium copper

Environmental


Temperature:	-55~+165°C
--------------	------------

How To Order

- NAXX-MM** - MMCX(m) to MMCX(m), Outline A
NAXX-FF - MMCX(f) to MMCX(f), Outline B
NAXX-MF - MMCX(m) to MMCX(f), Outline C

Customization is available upon request.

Outline Drawings

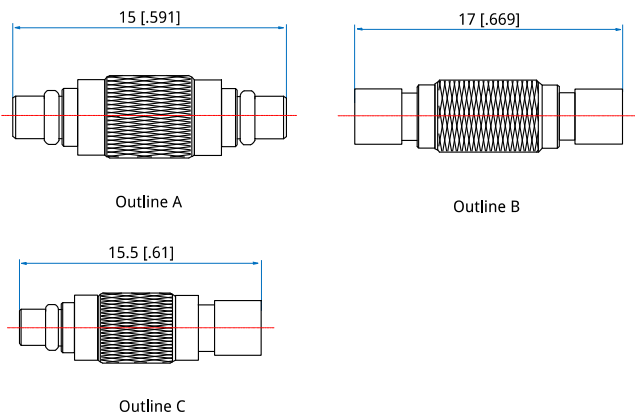

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]