

NAQAS

Quick SSMA to SMA

Features:

- * Low VSWR

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar


Electrical

Frequency:	DC~18GHz
VSWR:	1.15 max.
Insertion Loss:	0.07dB max.
Dielectric Withstanding Voltage:	750V RMS
Impedance of Dielectric:	5000MΩ min.
Impedance of Contact (Center):	3mΩ max.
Impedance of Contact (Outer):	2.5mΩ max.
Impedance:	50Ω

Mechanical

RF Connectors:	Quick SSMA SMA
Mating Life Cycle:	500 cycles
Outer Conductor:	Passivated stainless steel & Gold plated beryllium copper
Dielectric:	PTFE
Inner Conductor:	Gold plated beryllium copper

Outline Drawings

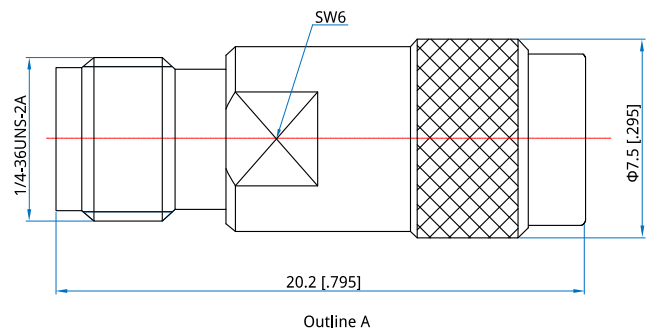

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

NAQAS-MF - Quick SSMA(m) to SMA(f), Outline A

Customization is available upon request.