

NAMK3

NMD 2.92mm to 3.5mm

- Features:

 - * Low VSWR
- Applications:

 - * Wireless
 - * Transmitter
 - * Laboratory Test
 - * Radar

Electrical

| | |
|------------|----------|
| Frequency: | DC~33GHz |
| VSWR: | 1.2 max. |
| Impedance: | 50Ω |


Mechanical

| | |
|--------------------|------------------------------|
| RF Connectors: | NMD 2.92mm 3.5mm |
| Mating Life Cycle: | 500 cycles |
| Outer Conductor: | Passivated stainless steel |
| Dielectric: | PEI |
| Inner Conductor: | Gold plated beryllium copper |

Environmental

| | |
|--------------|------------|
| Temperature: | -55~+165°C |
|--------------|------------|

Outline Drawings

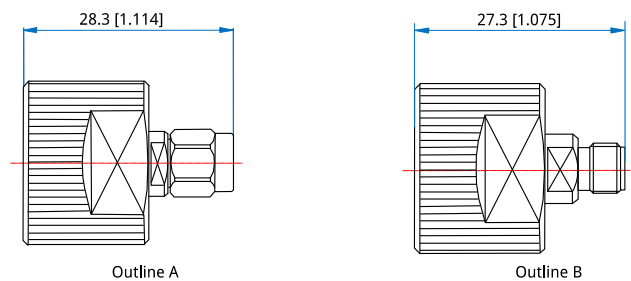

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

NAMK3-FM - NMD 2.92mm(f) to 3.5mm(m), Outline A

NAMK3-FF - NMD 2.92mm(f) to 3.5mm(f), Outline B

Customization is available upon request.