

NAMV3

NMD 1.85mm to 3.5mm

- Features:

 - * Low VSWR
- Applications:

 - * Wireless
 - * Transmitter
 - * Laboratory Test
 - * Radar

Electrical

Frequency:	DC~33GHz
VSWR:	1.2 max.
Impedance:	50Ω


Mechanical

RF Connectors:	NMD 1.85mm 3.5mm
Mating Life Cycle:	500 cycles
Outer Conductor:	Passivated stainless steel
Dielectric:	PEI
Inner Conductor:	Gold plated beryllium copper

Environmental

Temperature:	-55~+165°C
--------------	------------

Outline Drawings

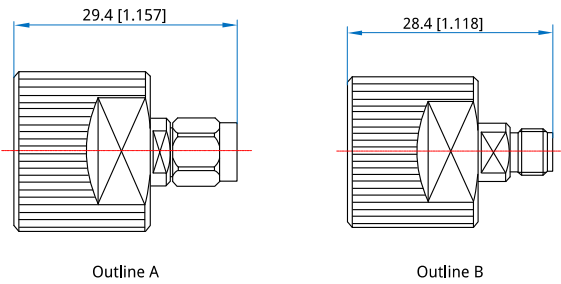

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

- NAMV3-FM** - NMD 1.85mm(f) to 3.5mm(m), Outline A
NAMV3-FF - NMD 1.85mm(f) to 3.5mm(f), Outline B

Customization is available upon request.