

NA22

2.4mm to 2.4mm

Features:

- * Low VSWR

Applications:

- * Wireless
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

| | |
|------------|-----------|
| Frequency: | DC~50GHz |
| VSWR: | 1.25 max. |
| Impedance: | 50Ω |

Mechanical

| | |
|--------------------|--|
| RF Connectors: | 2.4mm |
| Mating Life Cycle: | 500 cycles |
| Outer Conductor: | Passivated stainless steel |
| Dielectric: | PEI |
| Inner Conductor: | Gold plated beryllium copper or gold plated brass |

Environmental

| | |
|--------------|------------|
| Temperature: | -60~+165°C |
|--------------|------------|

How To Order

NA22-MM - 2.4mm(m) to 2.4mm(m), Outline A

NA22-MF - 2.4mm(m) to 2.4mm(f), Outline B

NA22-FF - 2.4mm(f) to 2.4mm(f), Outline C

NA22R-MM - 2.4mm(m) to 2.4mm(m), right angle, Outline D

NA22R-MF - 2.4mm(m) to 2.4mm(f), right angle, Outline E


NA22R-FF - 2.4mm(f) to 2.4mm(f), right angle, Outline F

NA22L-FF - 2.4mm(f) to 2.4mm(f), flange mount, Outline G

NA22H-FF - 2.4mm(f) to 2.4mm(f), bulk head, Outline H

Customization is available upon request.

Outline Drawings

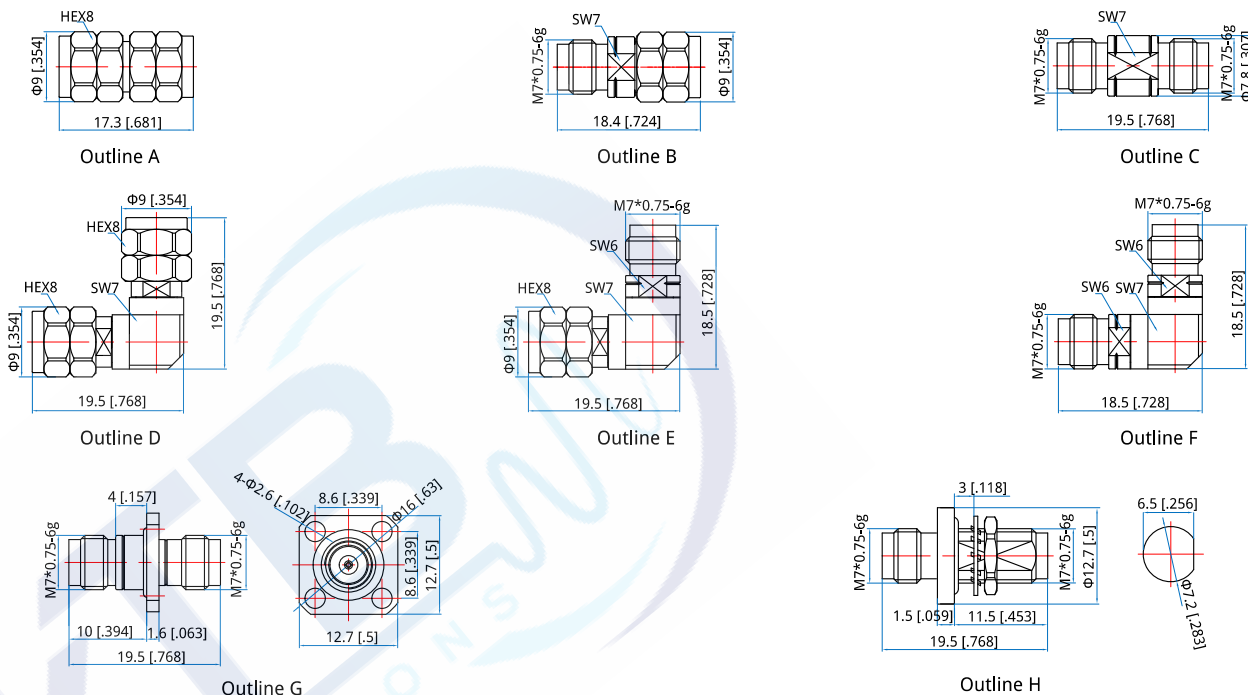

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]