

NANL

N to L27

Features:
* Low VSWR

Applications:
* Wireless
* Transmitter
* Laboratory Test
* Radar

Electrical

Frequency: DC~6GHz
VSWR: 1.2 max.
Impedance: 50Ω


Mechanical

RF Connectors: N
L27
Mating Life Cycle: 500 cycles
Outer Conductor: Ternary alloy plated brass
Dielectric: PTFE
Inner Conductor: Gold Platedbrass

Environmental

Temperature: -45~+85°C

Outline Drawings

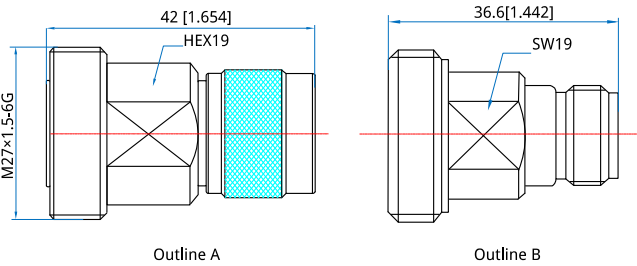

Unit: mm [in]
Tolerance: ±0.2mm [±0.008in]

How To Order

NANL-MF - N(m) to L27(f), Outline A
NANL-FF - N(f) to L27(f), Outline B

Customization is available upon request.