

**NC1-FL2G-S23-01**

## 1.0mm Connector, DC~110GHz

### Features:

- \* Low VSWR

Applications:

- \* Wireless
- \* Radar
- \* Instruments
- \* Electronics


## Electrical

Frequency:	DC~110GHz
VSWR:	1.35 max.
Impedance:	50Ω

## Mechanical

RF Connector:	1.0mm female
Outer Conductor:	Passivated SUS303 stainless steel
Dielectric:	ULTEM
Inner Conductor:	Gold plated beryllium copper
Accept PIN:	Φ0.23mm

## Outline Drawings

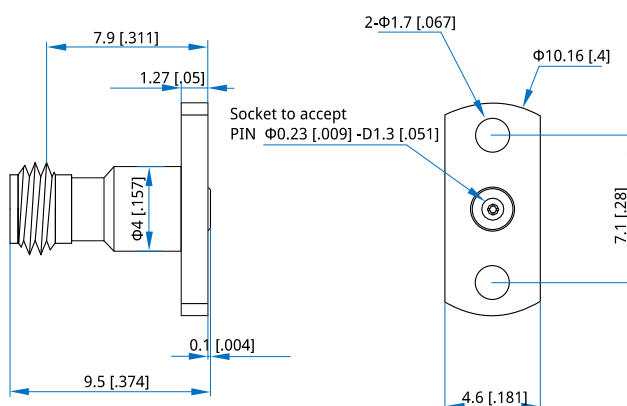

Unit: mm [in]

Tolerance:  $\pm 0.2\text{mm}$  [ $\pm 0.008\text{in}$ ]

## How To Order

NC1-FL2G-S23-01

Customization is available upon request.