

## NCK-ML2G-D

2.92mm Connector, DC~40GHz

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

### Electrical

Frequency:	DC~40GHz
VSWR:	1.15 max.
Impedance of Dielectric:	3000MΩ min.
Impedance of Inner Conductor:	3mΩ max.
Impedance of Outer Conductor:	2mΩ max.
Voltage Withstand:	750V DC
Impedance:	50Ω


### Mechanical

RF Connector:	2.92mm Male
Mating Life Cycle:	500 cycles
Outer Conductor:	Passivated SUS303 Stainless Steel
Dielectric:	PEI & PTFE or PEI
Inner Conductor:	Gold Plated Beryllium Copper


### Environmental

Temperature:	-55~+165°C
--------------	------------


### Outline Drawings

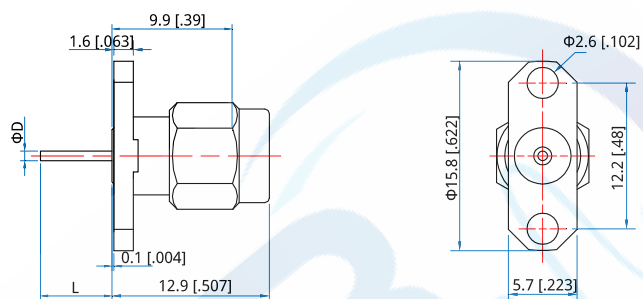

Part Number	ΦD	L
NCK-ML2G-D64-01	0.64 [.025]	10.92 [.43]
NCK-ML2G-D64-02	0.64 [.025]	6.84 [.269]

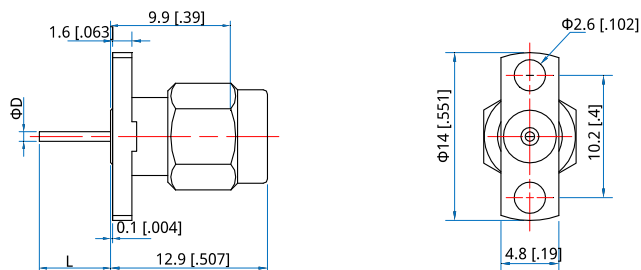

Part Number	ΦD	L
NCK-ML2G-D64-03	0.64 [.025]	10.92 [.43]
NCK-ML2G-D64-04	0.64 [.025]	6.84 [.269]

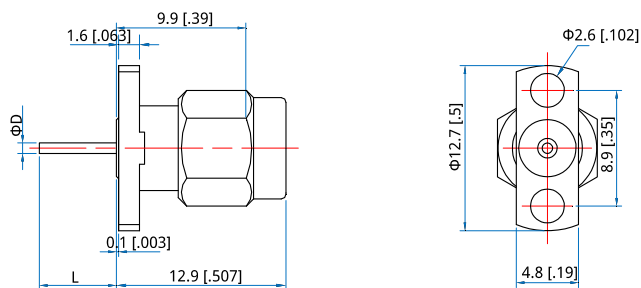

Part Number	ΦD	L
NCK-ML2G-D64-05	0.64 [.025]	10.92 [.43]
NCK-ML2G-D64-06	0.64 [.025]	6.84 [.269]

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]