

NCK-MG-T50-1

2.92mm Male

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency: DC~40GHz
VSWR: 1.25 max.

Mechanical


RF Connector: 2.92mm male
Mating Cable: NT50
Outer Conductor: Passivated stainless steel

How To Order

NCK-MG-T50-1

Customization is available upon request.

Outline Drawings

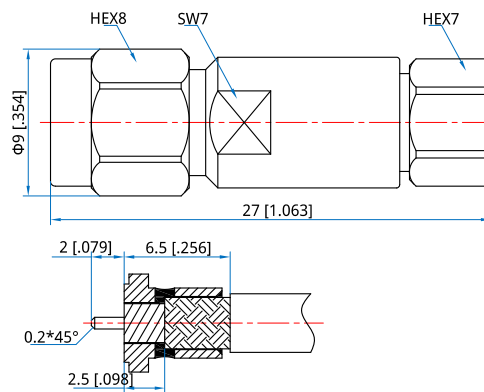

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]