

NCP-MRB-086-1

SMP Male Right Angle

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency: DC~6GHz
VSWR: 1.2 max.
Impedance: 50Ω

Mechanical

RF Connector: SMP male right angle
Mating Cable: NH280, ND086, NE086, RG316, RG316D
Outer Conductor: Gold plated brass
Dielectric: PTFE
Inner Conductor: Gold plated brass

Environmental


Temperature: -55~+125°C

How To Order

NCP-MRB-086-1

Customization is available upon request.

Outline Drawings

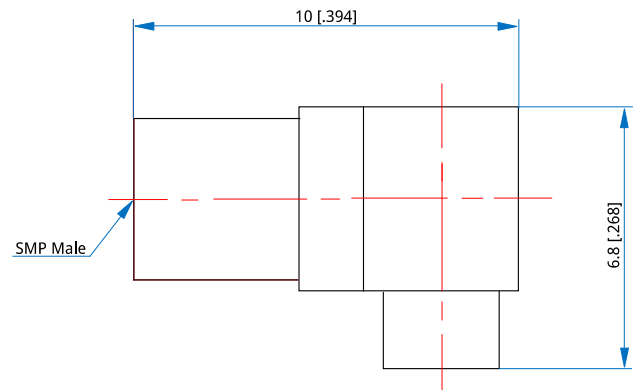

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]