

NCK-FG-T50P-3 2.92mm Female

Features:
 * Low VSWR

Applications:
 * Wireless
 * Radar
 * Instruments
 * Electronics

Electrical

Frequency:	DC-40GHz
VSWR:	1.3 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V DC min.
Impedance:	50Ω


Mechanical

RF Connector:	2.92mm Female
Mating Cable:	NT50P
Outer Conductor:	Passivated stainless steel
Dielectric:	PEI
Inner Conductor:	Gold plated beryllium copper

How To Order **NCK-FG-T50P-3**

Customization is available upon request.

Outline Drawings

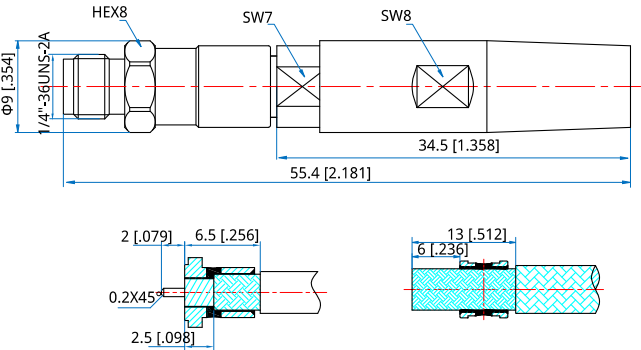

Unit: mm [in]
 Tolerance: ±0.2mm [±0.008in]