

# NCN-MG-A360-1

## N Male

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

### Electrical

Frequency:	DC~18GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V DC
Impedance:	50Ω

### Mechanical


RF Connector:	N Male
Mating Cable:	NA360
Outer Conductor:	Passivated Stainless Steel
Dielectric:	PTFE
Inner Conductor:	Gold Plated Beryllium Copper

### How To Order

**NCN-MG-A830-1**

Customization is available upon request.


### Outline Drawings

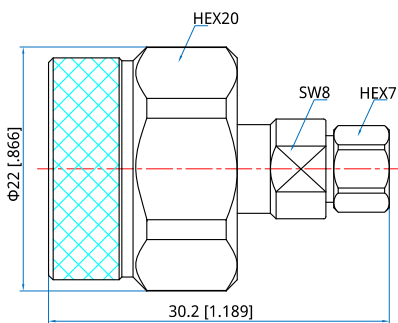

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### Stripping Reference



Unit: mm [in]

Tolerance: ±0.1mm [±0.004in]