

## NCK-FG-A400-1

### 2.92mm Female

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

#### Electrical

Frequency:	DC~40GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V DC min.
Impedance:	50Ω

#### Mechanical


RF Connector:	2.92mm Female
Mating Cable:	NA400
Outer Conductor:	303F stainless steel

#### How To Order

**NCK-FG-A400-1**

Customization is available upon request.

#### Outline Drawings

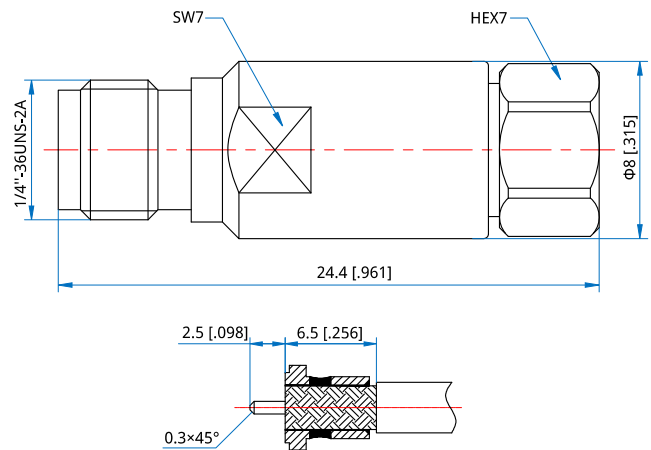

Unit: mm [in]  
Tolerance:  $\pm 0.2\text{mm}$  [ $\pm 0.008\text{in}$ ]