

## NCN-MG-A830-1

N Male

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics



### Electrical

Frequency:	DC~18GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	2000V DC
Impedance:	50Ω

### Mechanical


RF Connector:	N male
Mating Cable:	NA830
Outer Conductor:	303F stainless steel

### How To Order

**NCN-MG-A830-1**

Customization is available upon request.


### Outline Drawings

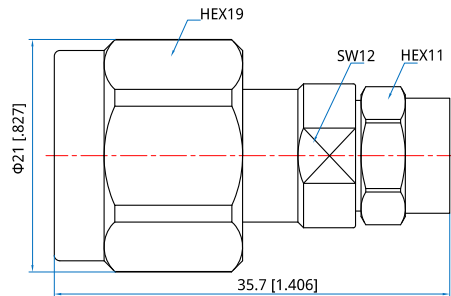

Unit: mm [in]

Tolerance:  $\pm 0.2\text{mm}$  [ $\pm 0.008\text{in}$ ]

### Stripping Reference



Unit: mm [in]

Tolerance:  $\pm 0.1\text{mm}$  [ $\pm 0.004\text{in}$ ]