

## NC7-MB-B1200-1 7/16 Male

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics



### Electrical

Frequency:	DC-6GHz
VSWR:	1.4 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	1000V DC
Impedance:	50Ω

### Mechanical


RF Connector:	7/16 Male
Mating Cable:	NB1200
Outer Conductor:	Ternary alloy plated brass
Dielectric:	PTFE
Innerr Conductor:	Silver plated brass

### How To Order

**NC7-MB-B1200-1**

Customization is available upon request.

### Outline Drawings

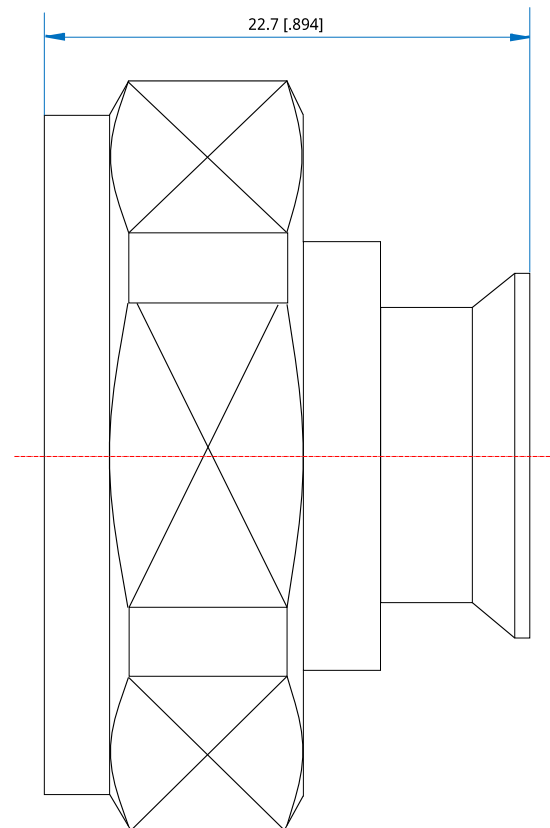

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]