

# NCN-MG-B1200-1

## N Male

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics



### Electrical

Frequency: DC~10GHz  
VSWR: 1.3 max.

### Mechanical


RF Connector: N Male  
Mating Cable: NB1200  
Outer Conductor: Passivated Stainless Steel  
Inner Conductor: Gold Plated Beryllium Copper

### How To Order

**NCN-MG-B1200-1**

Customization is available upon request.

### Outline Drawings

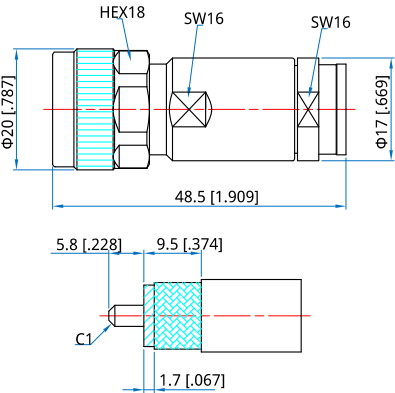

Unit: mm [in]  
Tolerance:  $\pm 0.2\text{mm}$  [ $\pm 0.008\text{in}$ ]