

NCA-FL2G-047-1

SSMA Female

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~26.5GHz
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	500V DC
Impedance:	50Ω

Mechanical


RF Connector:	SSMA female
Mating Cable:	ND047
Material:	Beryllium copper

How To Order

NCA-FL2G-047-1

Customization is available upon request.

Outline Drawings

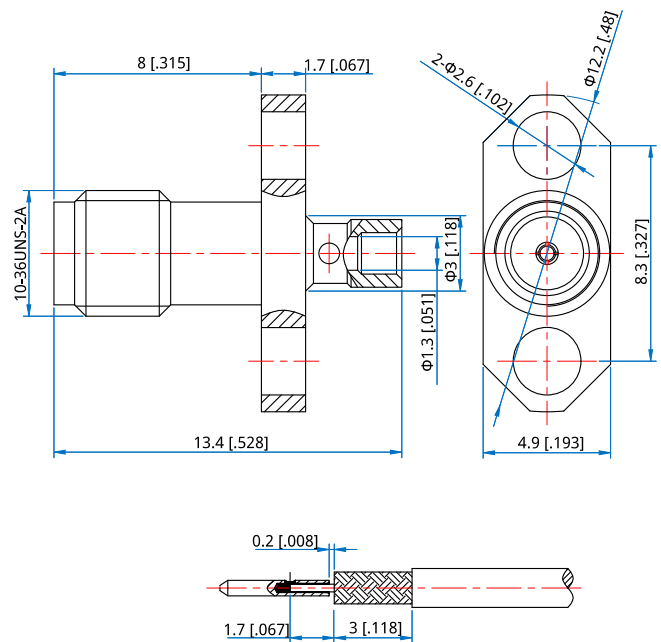

Unit: mm [in]
Tolerance: ±0.1mm [±0.004in]