

NCS-MCB-R1500-1

SMA Male, Crimp

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics

Electrical

Frequency:	DC~6GHz
VSWR:	1.3 max.
Voltage Withstand:	1000V DC
Impedance of Dielectric:	5000M Ω min.
Impedance:	50 Ω


Mechanical

RF Connector:	SMA male
Mating Cable:	NR1500
Mating Life Cycle:	500 cycles
Outer Conductor:	Ternary alloy plated brass
Inner Conductor:	Gold plated brass
Dielectric:	PTFE

Environmental

Operating Temperature:	-55~+165°C
------------------------	------------

Outline Drawings

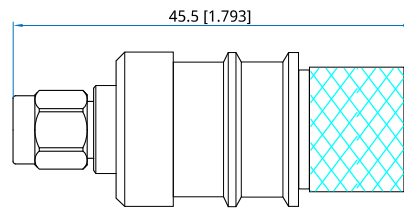

Unit: mm [in]
Tolerance: ± 0.2 mm [± 0.008 in]

How To Order

NCS-MCB-R1500-1

Customization is available upon request.