

## NCS-MG-047-1

### SMA Male

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics



#### Electrical

Frequency:	DC~26.5GHz
VSWR:	1.25 max.
Impedance of Dielectric:	5000MΩ min.
Voltage Withstand:	500V DC min
Impedance:	50Ω

#### Mechanical



RF Connector:	SMA male
Mating Cable:	NA150, NH160, ND047, NE047
Outer Conductor:	Stainless steel

#### How To Order

#### NCS-MG-047-1

Customization is available upon request.

#### Outline Drawings

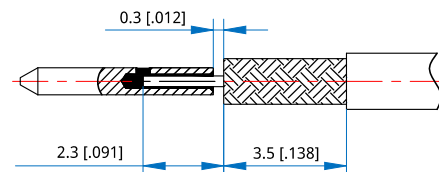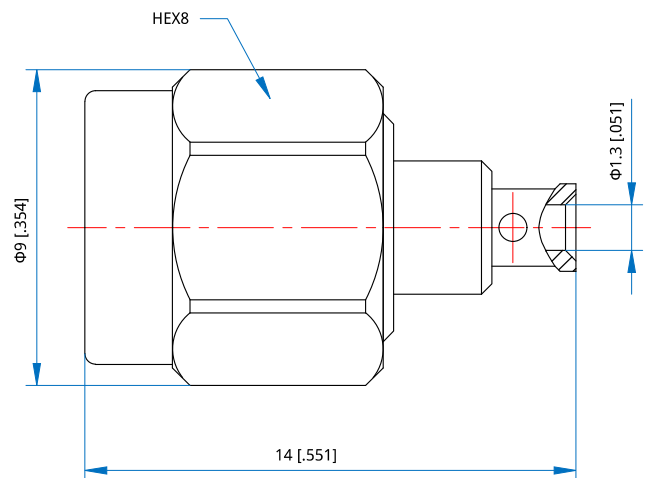

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]