

## NCK-FL2G-A220-1

### 2.92mm Female, 2-Hole Flange Mount

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

#### Electrical

Frequency: DC~40GHz  
VSWR: 1.25 max.  
Impedance: 50Ω

#### Mechanical


RF Connector: 2.92mm Female  
Mating Cable: NH280, ND086, NE086, RG316  
RG316D  
Outer Conductor: 303F stainless steel

#### How To Order

**NCK-FL2G-A220-1**

Customization is available upon request.

#### Outline Drawings

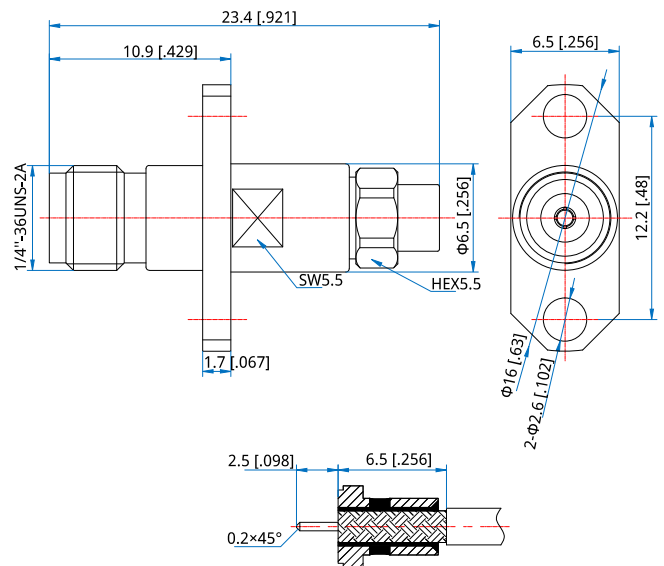

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]