

NC-8-FB-086-1

DC~67GHz, SSMP Female

Features:
* Low VSWR

Applications:
* Wireless
* Radar
* Instruments
* Electronics



Electrical

Frequency: DC~67GHz
Impedance: 50Ω
VSWR: 1.25 typ. @DC~40GHz

Mechanical

Mating Cable: NA220, NH280, NK086, NF086, NE086, ND086
Matching PCB Connector: NC-8-MB-01
Conductor: Gold plated brass
Connector*1: SSMP female
[1] Mateable with GPPO, SMPM & Mini-SMP.

Environmental


Temperature: -55~+155°C

How To Order

NC-8-FB-086-1

Customization is available upon request.

Outline Drawings

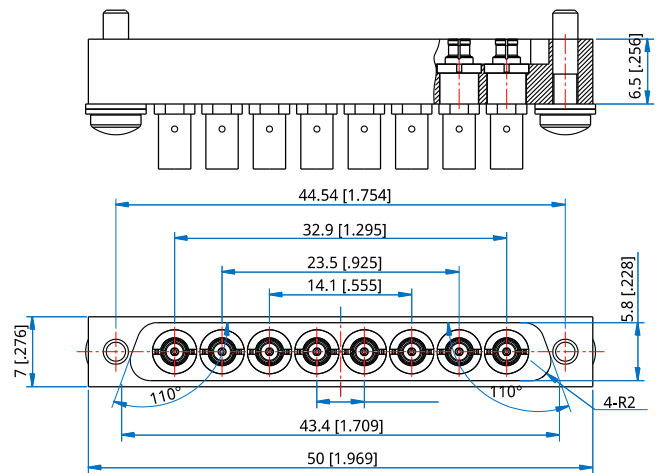

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]