

## NCN-FHCB-RG316D-1

N Female, Bulk head, Crimp

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics


### Electrical

Frequency: DC~6GHz  
VSWR: 1.15 max. @DC~3GHz  
Impedance: 50Ω  
Voltage: 500VRMS

### Mechanical

RF Connector: N Female  
Mating Cable: RG316D  
Material: Nickel plated brass  
Dielectric: PTFE  
Inner Conductor: Gold plated phosphor copper or gold plated brass

### Outline Drawings

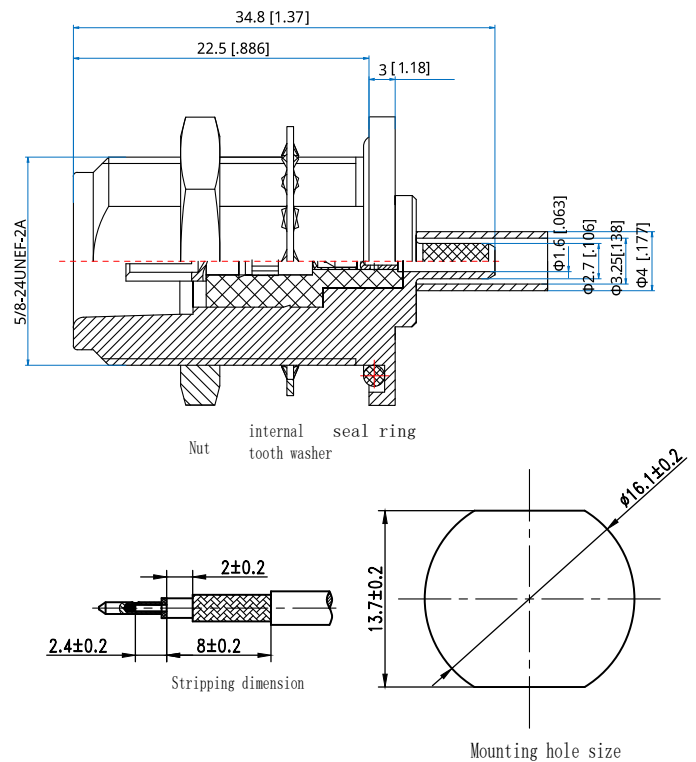

Customization is available upon request.

How To Order  
[NCN-FHCB-RG316D-1](#)

Unit: mm [in]  
Tolerance: ±0.2mm [±0.008in]

## NCN-FHCB-RG316D-1

N Female, Bulk head, Crimp

Features:  
\* Low VSWR

Applications:  
\* Wireless  
\* Radar  
\* Instruments  
\* Electronics

### Electrical

Frequency: DC~6GHz  
VSWR: 1.15 max. @DC~3GHz  
Impedance: 50Ω

### Mechanical


RF Connector: N Female  
Mating Cable: RG316D  
Material: Nickel plated brass  
Dielectric: PTFE  
Inner Conductor: Gold plated phosphor copper  
or gold plated brass

### How To Order

**NCN-FHCB-RG316D-1**

Customization is available upon request.

### Outline Drawings

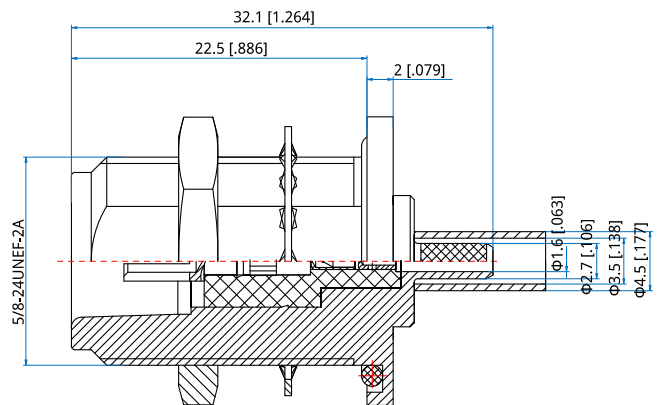

Unit: mm [in]

Tolerance:  $\pm 0.2\text{mm}$  [ $\pm 0.008\text{in}$ ]