

NDDC-400-450-20-40-S

0.4~0.45GHz, 20W, 40dB

Features:

- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.4–0.45GHz
Insertion Loss:	0.3dB max.
Coupling:	40±1dB
Coupling Flatness:	±1dB max.
Directivity:	20dB min.
VSWR:	1.3 max.
Average Power:	20W max.

Mechanical


Size*1:	288*27*15mm 11.339*1.063*0.591in
Connectors:	SMA Female
Mounting:	4-Φ2.3mm through-hole

[1] Exclude connectors

Environmental

Operating Temperature:	-20~+70°C
Non-operating Temperature:	-25~+75°C

Outline Drawings

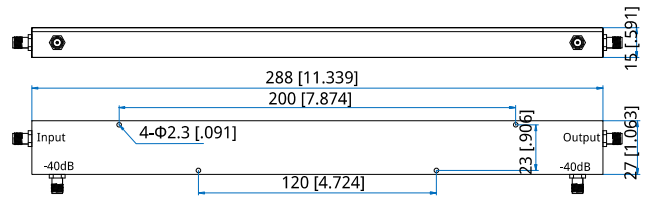

Unit: mm [in]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

How To Order

NDDC-400-450-20-40-S

Customization is available upon request.