

## ND-10-40000

### Broadband & High Sensitivity

#### Features:

- \* Broadband
- \* High Sensitivity

#### Applications:

- \* Telecom
- \* Instrumentation
- \* Laboratory Test
- \* Radar

#### Electrical

Frequency Range:	0.01~40GHz
Sensitivity:	350mV/mW
Flatness:	±1.75dB max.
VSWR:	2 max.
Polarity:	Negative
Input Power Without Damage:	20dBm


#### Mechanical

Size*1:	Φ9.5*34.8mm
	Φ0.374*1.370in
Weight:	100g max.
Input Connector:	2.4mm Male
Output Connector:	SMA Female

#### Environmental

Operating Temperature:	0~+50°C
Non-operating Temperature:	-20~+70°C

#### Outline Drawings

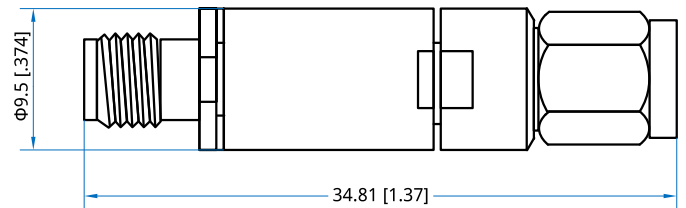

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

#### How To Order

**ND-10-40000**

Customization is available upon request.