

## NHC9-2000-8000-60

2~8GHz, 60W

### Features:

- \* Broadband
- \* High Power
- \* Low Insertion Loss

### Applications:

- \* Amplifiers
- \* Transmitter
- \* Laboratory Test
- \* Radar

### Electrical

Frequency:	2~8GHz
Insertion Loss:	0.8dB max.
Isolation:	17dB min.
VSWR:	1.5 max.
Amplitude Balance:	±1dB
Phase Balance:	±8°
Average Power:	60W max.
Impedance:	50Ω

### Mechanical


Size*1:	60*25*11mm 2.362*0.984*0.433in
Port Connectors:	Pin (Φ0.5*2mm)
Mounting:	4-Φ2.3mm through-hole

[1] Exclude connectors.

### Environmental

Operating Temperature:	-30~+70°C
Non-operating Temperature:	-40~+80°C

### Outline Drawings

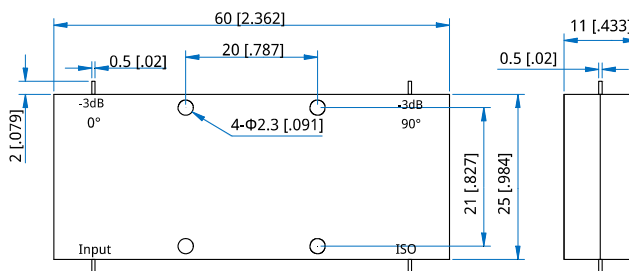

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**NHC9-2000-8000-60**

Customization is available upon request.