

NSDC-800-2700-50-10-S

0.8~2.7GHz, 50W, 10dB

Features:

- * Broadband
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	0.8~2.7GHz
Insertion Loss:	1.0dB max.
VSWR:	1.2 max.
Directivity:	18dB min.
Coupling:	10±1dB
Coupling Flatness:	±1.0dB max.
Impedance:	50Ω
Average Power:	50W

Mechanical


Size*1:	112*17*12.7mm 4.45*0.67*0.5in
Connectors:	SMA Female
Mounting:	4-Φ2.8mm through-hole

[1] Exclude connectors and terminations.

Environmental

Temperature:	-35~+75°C
--------------	-----------

Outline Drawings

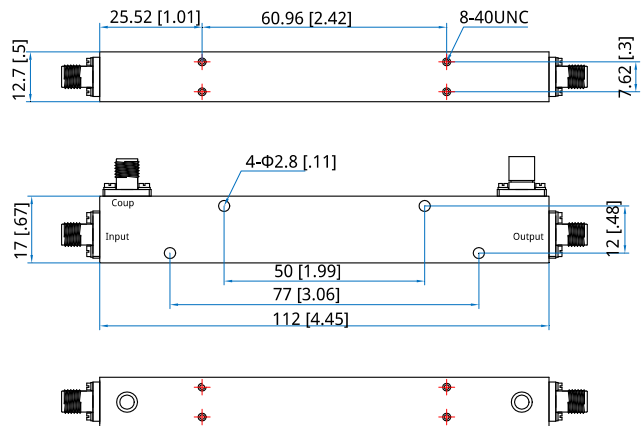

Unit: mm [in]

Tolerance: ±0.5mm [±0.02in]

How To Order

NSDC-800-2700-50-10-S

Customization is available upon request.