

NHC9-100-140-10-S

100~140MHz, 10W

Features:

- * Broadband
- * High Power
- * Low Insertion Loss

Applications:

- * Amplifiers
- * Transmitter
- * Laboratory Test
- * Radar

Electrical

Frequency:	100~140MHz
Insertion Loss:	0.5dB max.
Isolation:	18dB min.
VSWR:	1.3 max.
Amplitude Balance:	±0.7dB
Phase Balance:	±5°
Average Power:	10W max.
Impedance:	50Ω

Mechanical


Size* ¹ :	67*60*13mm 2.638*2.362*0.512in
RF Connectors:	SMA Female
Mounting:	2-Φ2.8mm through-hole

[1] Exclude connectors.

Environmental

Operating Temperature:	-30~+70°C
Non-operating Temperature:	-40~+80°C

Outline Drawings

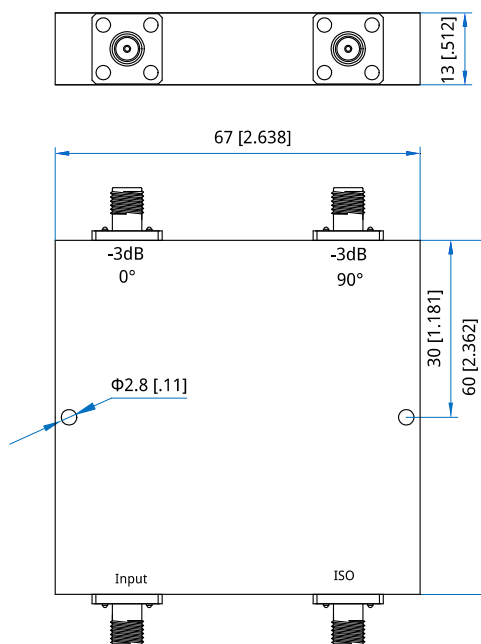

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

How To Order

NHC9-100-140-10-S

Customization is available upon request.