

NDI6466K High Power, High Isolation

Features:

- * High Power
- * High Isolation
- * Low Insertion Loss
- * Low VSWR

Applications:

- * Wireless
- * Radar
- * Laboratory Test


Description

NDI6466K series Drop-In Isolators cover frequency range 950~2000MHz. High power, high isolation and low insertion loss make it ideal for a lot of applications like amplifiers, transceivers, etc.

Specifications

Frequency (MHz)	Bandwidth (MHz)	Insertion Loss (dB Max.)	Isolation (dB Min.)	VSWR (Max.)	Fwd Power (W Max.)	Rev Power (W)	Temperature (°C)
950-2000	1050	0.65	16.0	1.40	100	10~100	0~+60
1000-2000	1000	0.60	17.0	1.40	100	10~100	0~+60

Outline Drawings

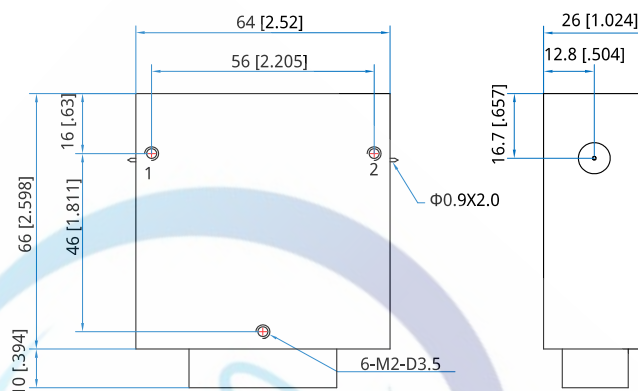

Unit: mm [inch]

Tolerance: $\pm 0.2\text{mm}$ [$\pm 0.008\text{in}$]

Mechanical

Size^{*1}: 64*66*26mm

2.25*2.598*1.024in

Connector Type: Strip line

Mounting: 6-M2, depth 3.5mm

[1] Exclude connectors and terminations.

How To Order

NDI6466K-X-Y-Z

X: Start frequency in MHz

Y: Stop frequency in MHz

Z: Reverse Power in W

Examples:

To order a NDI6466K series Isolator, 950~2000MHz, 20W, specify NDI6466K-950-2000-20.

Customization is available upon request.