

## NFM2-22000-28000-10

22~28GHz, 10dBm

### Features:

- \* Broadband
- \* Low Power Consumption

### Applications:

- \* Wireless
- \* Transmitter
- \* Laboratory Test

### Electrical

Input Frequency:	11~14GHz
Output Frequency:	22~28GHz
Input Power:	3~6dBm
Output Power:	10dBm min.
Multiple Ratio:	2
Voltage:	+5±0.5V DC
Current:	100mA max.
Impedance:	50Ω

### Mechanical


Size <sup>*1</sup> :	15*25*8mm 0.591*0.984*0.315in
RF Connectors:	SMA Female
Mounting:	4-Φ2.2mm through-hole

[1] Exclude connectors.

### Environmental

Operating Temperature:	-40~+85°C
------------------------	-----------

### Outline Drawings

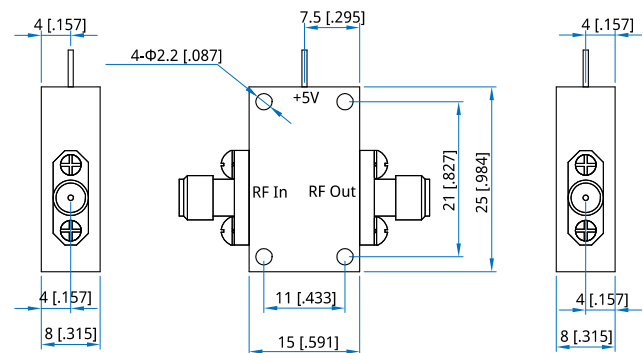

Unit: mm [in]

Tolerance: ±0.2mm [±0.008in]

### How To Order

**NFM2-22000-28000-10**

Customization is available upon request.